



ANLY TIMER

AH5CN DIGITAL TIMER



CHARACTERISTIC :

- 7-segment-display for clear display and effective monitoring
- Protection against power surge and high frequency interference
- Base-10 (99.99S ~ 99990H) and Base-60 (99M59S or 99H59M) time ranges available
- Memory switch allows users to enable or disable memory function
- Manual reset button on faceplate
- 2 modes selectable via slide switch: Mode A (2C) for DPDT time-limiting output contacts and Mode B (1A1C) for SPDT instantaneous and time-limiting output contacts
- Can be used as a "Hour Meter"
- External pause contact available on G type
- UL, C-UL recognized and CE certified

SPECIFICATION :


Operating voltage	AC/DC(V): 12~48 or 100~240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.1S
Power consumption	Approx. 2.5VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approx. 130g

TYPE SELECTION :


Output contact	Mode A / B	G Type	Mode A / B + G Type
Type	AH5CN	AH5CN-G	AH5CN-11
Time range	99.99S , 999.9S , 9999S , 999.9M , 9999M , 999.9H , 9999H , 99M59S or 99H59M		
Type	AH5CN-R	AH5CN-RG	AH5CN-R11
Time range	8 Ranges: 99.99S / 999.9S / 9999S / 999.9M / 9999M / 999.9H / 9999H / 99990H		

CONNECTION :


2C, Mode A




1A1C, Mode B



G Type




AH5CN-11, AH5CN-R11




TIMING CHART :


2C, Mode A




1A1C, Mode B



G Type




AH5CN-11, AH5CN-R11




DIMENSIONS : (mm)

N type(Surface Mounting): Using P2CF-08 , PF085A Socket or PF113A Socket(for AH5CN-11 or AH5CN-R11 use)

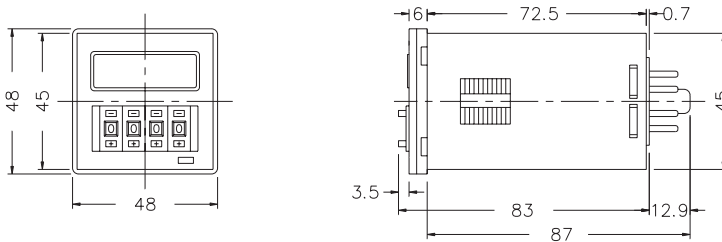

Y type(Flush Mounting): Using Y50 Frame & US-08 Socket, P3G-08 Socket or P3G-11 Socket(for AH5CN-11 or AH5CN-R11 use)

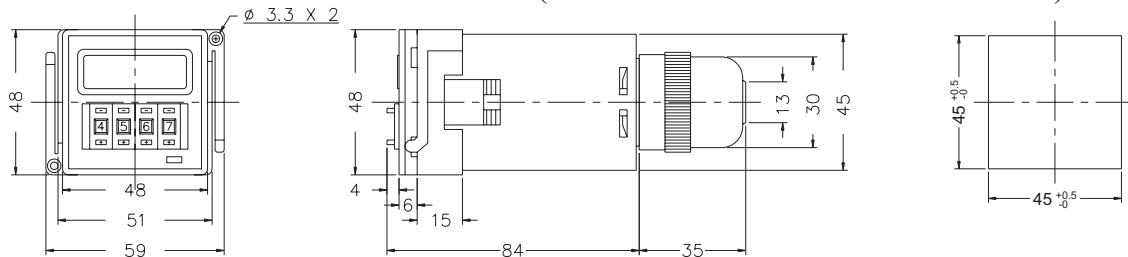

ONLY ELECTRONICS CO., LTD.

<http://www.ONLY.com.tw>

TAIWAN MAIN OFFICE : ONLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Shinjuang City, Taipei, Taiwan 242
TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia
TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

HONG KONG BRANCH : ONLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong
TEL: +852-2397-2505 FAX: +852-2397-6080

SHANGHAI BRANCH : ONLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingan District, Shanghai, China 200041
TEL: +86-21-6218-3300 FAX: +86-21-6217-5911

NO. AH5CN-G-A